



CLEAN OIL
BRIGHT IDEAS

CJC™ Product Sheet

APPLICATION

The CJC™ BLA 15/25 Filter Insert is used in CJC™ Filter Separators ideal for filtration of mineral based oils of up to ISO VG 150 cSt and is used for, typically:

- hydraulic oils
- diesel oils
- turbine lube oils
- gear oils

And for CJC™ Fine Filters ideal for filtration of oils contaminated with water, which is removed by other means, and for water based fluids, where the water should not be removed, typically:

- water glycols
- hydraulic oils
- gear oils
- lube oils

FILTRATION CAPABILITY

• Particle Removal

All CJC™ Filter Inserts have the following filtration degree:

- **3 μm absolute:**
98.7% of all solid particles $> 3 \mu\text{m}$
- **0.8 μm nominal:**
50% of all solid particles $> 0.8 \mu\text{m}$

are retained in each pass.

The dirt holding capacity of an BLA 15/25 Insert is 1.5 litres of evenly distributed solids.

• Degradation Products

Oxidation by-products, resin / sludge, and varnish are retained by the cellulose material. The cellulose will retain **appr. 1 kg** of degradation products.

• Water Removal

Unlike B Filter Inserts the BLA 15/25 will not permanently hold water, as its free passage is integral to the water separation process.

DIMENSIONS

The figures below are nominal:

Diameter:	15 cm
Height:	25 cm


COMPONENT

CJC™ Filter Inserts type BLA consist of bonded discs. Ingredient: Cotton linters (cellulose).

IDENTIFICATION

To order the BLA 15/25 Filter Insert, please use:

Article No: PA5601326

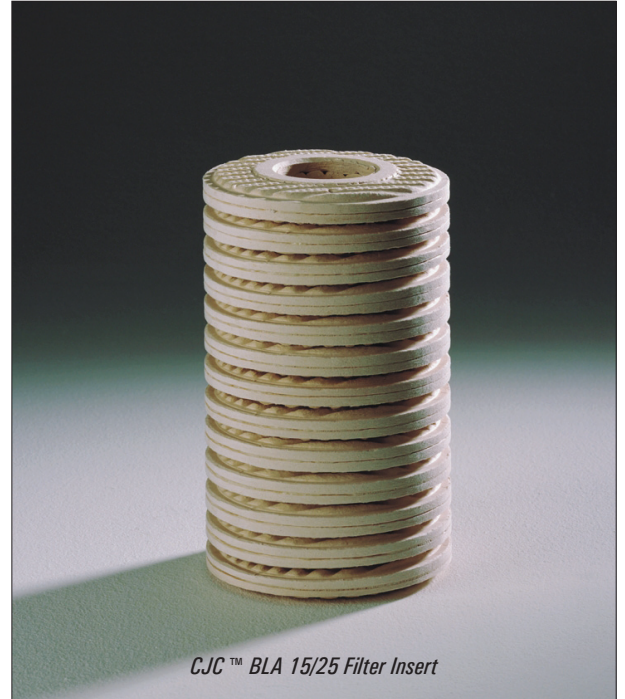

CJC™ BLA 15/25 Filter Insert