



CLEAN OIL
BRIGHT IDEAS

Automatic Air Vent

Bleeding and Venting Valve

CJC™ Product Sheet - Accessories

APPLICATION

The CJC™ Automatic Air Vent is used to release air from the CJC™ Filter Housing.

It is controlled by a float-controlled valve closing by rising oil level (bleeding) and opening by falling oil level (venting). Venting can be prevented by using a check valve.

The CJC™ Automatic Air Vent reduces the need for supervision and maintenance of the CJC™ Filters even further.


IDENTIFICATION

To order the Automatic Air Vent, please use:

Article No: FB5200700



The CJC™ Automatic Air Vent

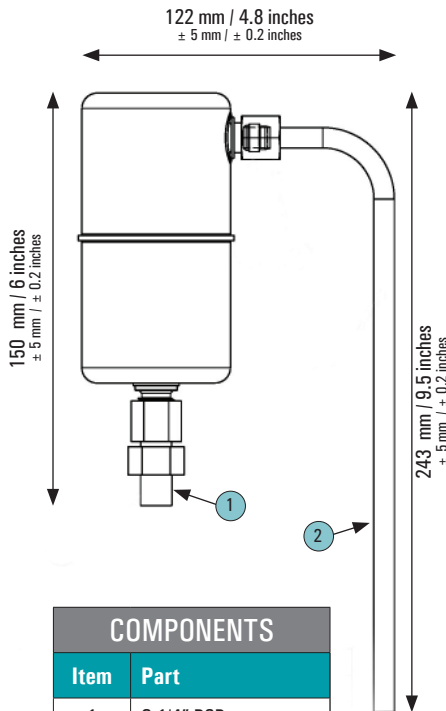

COMPONENTS	
Item	Part
1	G 1/4" BSP
2	Ø8mm Hydraulic Pipe

TECHNICAL DATA	
Area	Features
Fluids	Liquids
Nominal pressure	PN 16
Connection	G 1/4 A
Working pressure	0 - 4 bar
Temperature	Max. 120 °C
Capacity	Up to 7.0 Nm ³ /h
Quality	Stainless steel AISI 304

CAPACITY in Nm ³ /h						
P (bar)	0.1	0.2	0.5	1.0	2.0	4.0
Air flow (Nm ³ /h)	1.0	1.4	2.2	2.8	4.2	7.0